



INSTITUT GUMÁRENSKÉ TECHNOLOGIE A TESTOVÁNÍ, A.S.
RUBBER TECHNOLOGY AND TESTING INSTITUTE, Plc.
INSTITUT FÜR GUMMITECHNOLOGIE UND PRÜFWESSEN, A.G.
A.O. «ИНСТИТУТ ТЕХНОЛОГИИ РЕЗИНЫ И ИСПЫТАНИЙ»

Společnost je zapsána v obchodním rejstříku vedeném Krajským soudem v Brně, oddíl B, vložka 818



Zlín 18th July 2023

E8*75R00/19*1487*00

Trelleborg Wheel Systems Moto d.o.o.
Škofjeloška cesta 6
4000 Kranj
SLOVENIA

Communication concerning the approval and notification of approval number and inspection report issued by Inspection body IGTT

Tyre type fully complies requirements of ECE/UN R75.

Enclosed you will find the Communication concerning the approval of your tyres according to ECE/UN Regulation No. 75

On the base of this approval you are entitled to produce in your factory tyres of the dimension:

120/70B19 MITAS ENDURO TRAIL+ E-07+ DAKAR 60H

with the approval number : **E8 75R - 001487**

date of inspection : **18th July 2023**

inspector's name : **Václav Hořelka**

Sincerely yours,



Václav Hořelka
Head Of Tyre Approval Department
Head Of Inspection Body IGTT

Ministerstvo dopravy České republiky
Ministry of Transport of the Czech Republic
Nábřeží L. Svobody 12, 110 15 Praha 1, Czech Republic

OSVĚDČENÍ o ⁽¹⁾:

COMMUNICATION concerning ⁽¹⁾:



UDĚLENÍ HOMOLOGACE

ROZŠÍŘENÍ HOMOLOGACE
ZAMÍTNUTÍ HOMOLOGACE
ODEBRÁNÍ HOMOLOGACE
DEFINITIVNÍM UKONČENÍ VÝROBY

APPROVAL GRANTED

APPROVAL EXTENDED
APPROVAL REFUSED
APPROVAL WITHDRAWN
PRODUCTION DEFINITELY DISCONTINUED

typu pneumatiky pro motocykly a skútry podle Předpisu č. 75
of a type of pneumatic tyre for motorcycles and mopeds pursuant to Regulation No. 75

Homologace č.:

Approval No.: **E8*75R00/19*1487*00**

Rozšíření č.:

Extension No.: **N/A**

- | | | |
|---|---|--|
| 1. Jméno a adresa výrobce
Manufacturer's name and address: | : | Viz příloha č. 1 tohoto osvědčení
See Annex 1 of this approval certificate |
| 2. Označení typu pneumatiky ⁽²⁾
Tyre type designation ⁽²⁾ | : | |
| 2.1 Značka(y) / obchodní známka(y)
Brand name(s) / trademark(s) | : | MITAS |
| 2.2 Obchodní popis / obchodní jméno
Trade description(s) / commercial name(s) | : | ENDURO TRAIL+ E-07+ DAKAR |
| 3. Název a adresa zástupce výrobce
(je-li potřebné)
If applicable, name and address of
manufacturer's representative | : | N/A |
| 4. Souhrnný popis
Sumarized description | : | |
| 4.1. Označení rozměru pláště
Tyre size designation | : | 120/70B19 |
| 4.2. Kategorie užití
Category of use | : | normální / zimní / moped / terénní / speciální ⁽¹⁾
normal / snow / moped / all terrain (AT) / special ⁽¹⁾ |
| 4.3. Konstrukce
Structure | : | diagonální / radiální / smíšená ⁽¹⁾
diagonal / radial / bias belted ⁽¹⁾ |
| 4.4. Kategorie rychlosti
Speed category symbol | : | H |
| 4.5. Indexy nosnosti
Load capacity index | : | 60 |
| 4.6. U pneu All Terrain (AT) symbol určující
referenční huštění
For All Terrain (AT) tyres, the symbol
identifying the reference pressure | : | N/A |

5. Technický servis a případně zkušební laboratoř schválená pro účely schvalování nebo pro ověřování shodnosti
Technical service and where applicable, test laboratory additional approved purposes of approval or of verification of conformity
- 8/E:
IGTT a.s. - Institut gumárenské technologie a testování, a.s.
Rubber Technology and Testing Institute, Comp.
Šternberská 446, Louky,
763 02 ZLÍN,
CZECH REPUBLIC
6. Datum protokolu, vydaného touto zkušebnou
Date of report issued by that service
- 24.01.2023, 24.01.2023
20.01.2023, 20.01.2023
7. Číslo protokolu, vydaného touto zkušebnou
Number of report issued by that service
- 2023-456, 2023-454
2023-459, 2023-460
8. Důvod pro rozšíření (je-li potřebné)
Reason (s) of extension (if applicable)
- N/A
9. Poznámky
Any remarks
- N/A
10. Místo
Place
- Praha
Prague
11. Datum
Date
12. Podpis
Signature
- Elektronický podpis - 18.7.2023
Certifikát autora podpisu :
Jméno : Ing. Bc. Ivan Novák
Vydal : PostSignum Qualified CA-4
Platnost do : 25.2.2026 11:47:25+0000 (+1:00)
13. K osvědčení je přiložen seznam dokumentů obsažených v homologačních podkladech uložených u homologačního orgánu, který udělil homologaci, a které lze obdržet na vyžádání.
Annexed to this communication is a list of documents in the approval file deposited at the Approval Authority which has considered this approval and which can be obtained upon request.
- Seznam dokumentů
List of documents
- Žádost o udělení homologace / Application for approval
 - Výkresy bočnice a běhounu pláště / Drawing of the tyre sidewalls and tread
 - Kótovaný výkres příčného řezu pláště / Dimensioned drawing of tyre cross – section
 - Protokol o zkoušce dle bodu 7. / The test report as mentioned in item 7.

- (1) Nehodící se škrtněte
Delete that which does not apply
- (2) Seznam značek / ochranných známek nebo obchodních popisů / obchodních názvů může být přílohou k tomuto osvědčení
A list of brand name(s)/trademark(s) or trade description(s)/commercial name(s) may be annexed to this communication

E8 75 R 001487

Příloha č. 1 - Jméno a adresa výrobce
Annex 1 – Manufacturer's name and address:

Tyre Manufacturer (1)

SYAM Trelleborg Tires LLP
Plot No. 521, Sayakha Industrial Estate,
Near Village Juned, Taluka Vagra,
Dist. Bharuch, Gujarat, Pin-392140, INDIA

Tyre Manufacturer (2)

Trelleborg Wheel Systems Czech Republic a.s.
Vyrobní usek Zlín, Šedesátá č.p. 5638
762 02 Zlín, CZECH REPUBLIC

Tyre Manufacturer (3)

Trelleborg Wheel Systems Moto, d.o.o.
Škofjeloška cesta 6
4000 Kranj, SLOVENIA

**APPLICATION FOR APPROVAL OF A TYPE OF PNEUMATIC TYRE
FOR MOTORCYCLES AND MOPEDS ACCORDING TO ECE REGULATION No. 75**

E8 75R – 001487

4.1.1. Tyre size designation:	120/70B19
4.1.2. Manufacturers name, tyre name:	MITAS, ENDURO TRAIL+ E-07+ DAKAR
4.1.3. The category of use:	SNOW
4.1.4. Structure (diagonal, bias belted, radial):	BIAS BELTED
4.1.5. The speed category:	H
4.1.6. The load-capacity index of the tyre:	60
4.1.7. Tube type or Tubeless:	TUBELESS/TUBE TYPE
4.1.8. Normal or Reinforced:	NORMAL
4.1.9. Ply rating number of tyres for motorcycle derivatives:	TREAD: 2 POLYESTER+ 2 ARAMID SIDEWALL: 2 POLYESTER
4.1.10. The overall dimensions overall section width: overall diameter:	Overall section width: 124 mm Overall diameter: 658.0 mm
4.1.11. The rims on which the tyre can be mounted:	2.75-19, 3.00-19, 3.50-19, 3.75-19
4.1.12. The measuring rim and test rim:	3.50-19
4.1.13. The test and measurement pressure	Test pressure: 350 kPa Measuring pressure: 280 kPa
4.1.14. Factor x	/
4.1.15. Max allowed speed for load-capacity defined in 4.1.6.	210 km/h

Manufacturer's name and address:

Tyre Manufacturer (1)

SYAM Trelleborg Tires LLP
Plot No. 521, Sayakha Industrial Estate,
Near Village Juned, Taluka Vagra,
Dist. Bharuch, Gujarat, Pin-392140.


Tyre Manufacturer (2)

Trelleborg Wheel Systems Czech Republic a.s.
Výrobní úsek Zlín, Šedesátá č.p. 5638
762 02 Zlín, CZECH REPUBLIC


Tyre Manufacturer (3)

Trelleborg Wheel Systems Moto d.o.o.
Škofjeloška cesta 6,
4000 Kranj, Slovenia



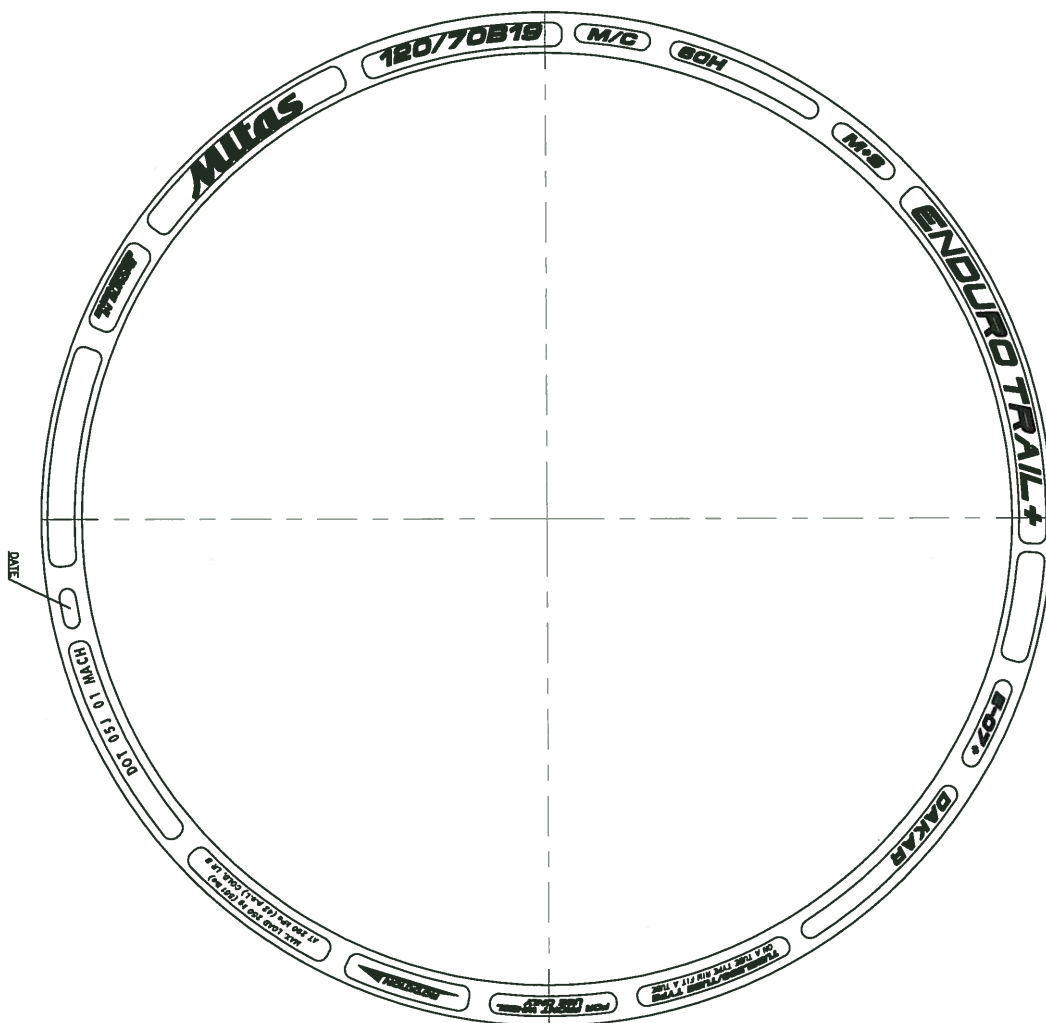


DISPOSITION ON TIRE - BOTTOM HALF OF THE WHEEL
(VIEW 0)




Firma: IGT a.s.		Jméno: IGT a.s.	
Adresa: Šternberská 446, Louky		Adresa: Šternberská 446, Louky	
PSČ: 763 02		PSČ: 763 02	
Město: Zlín		Město: Zlín	
Státní znak: CZ		Státní znak: CZ	
Výrobce: IGT a.s.		Výrobce: IGT a.s.	
Model: N369964		Model: N369964	
Datum: 15.11.2010		Datum: 15.11.2010	
Podpis: [Signature]		Podpis: [Signature]	
Místo: [Signature]		Místo: [Signature]	

88

IGT a.s.
 homologace pneumatik
 Šternberská 446, Louky
 763 02 Zlín, Czech Republic
 IČ/ID: 46900080 DIČ/VAT: CZ46900080

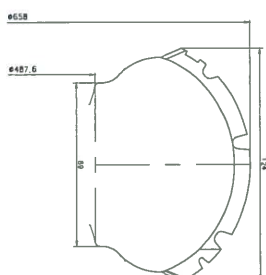

CROSS SECTION OF MOUNTED TREE

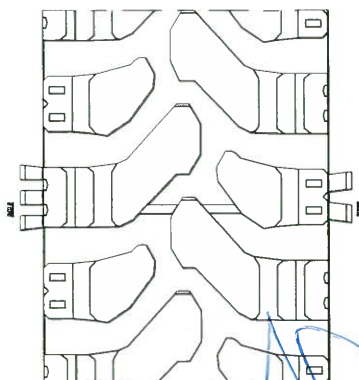

OVERALL (open) MITAS ENDURO TRAX + E-07 + TREAD PATTERN

IGTT a.s.
homologace pneumatik
Šternberská 446, Louky
763 02 Zlín, Czech Republic
IČ/ID: 46900080 DIČ/VAT: CZ46900080

[illegible]

**TRELLEBORG****TEST REPORT No. 2023 - 456**

TTC Zlín, Šternberská 446, Louky, 763 02 Zlín

Testing Laboratory No.1253, accredited by Czech Accreditation Institute according ČSN EN ISO/IEC 17025:2018

1. Customer: Trelleborg Wheel Systems Moto, d.o.
 Škofjeloška cesta 6
 4000 Kranj
 Slovenia
 Responsible: Mr. Lončarič
 Requirement No.: DLI/23018
 Dept.: Moto Kranj Task: 01S/2023/DLI
 Project No.: 70001034
 Application date: 16.01.2023
 Report issue date: 24.01.2023
 Test motive: Prototype tyres V1 (ECE homologation), 70001034 (224142)

2. Tested sample: Tyre
 Sort: M Ident. No.: 54559
 Dimension 120/70B19 Name: Mitas Enduro Trail+ E-07+ Dakar
 Designation I, V1 Product: TWS India Approval -
 LI: 60 SS: H IP: 290 kPa PR LR: B Type TL/TT M+S M
 Weight: 5,84 kg Measuring rim 3,50x19 DOT: - DOP: 4322

3. Test: Measurement of tyre dimensions
 Method: MZR-M-003 accredited

4. Test condition: Testing machine: - Drum: - mm Ambient temperature: 25±5°C
 Testing rim: MT3,50x19 H2 Inflation: 280 kPa
 Load: daN Drum speed: km/h Slip: 0° Camber: 0°
 Cycle min/max: Track min/max: km

5. Results: Overall diameter: 658 mm (M+S limits: from 646 to 671 mm)
 (MST limits: from 651 to 671 mm)
 Overall width: 124,0 mm (M+S/ MST limit: 145/ 165 mm)
 Undergo cycles: Undergo track: km

6. Evaluation: Criterion defined in ECE-R75
 Udiam: 0,6 mm Uwidth: 0,6 mm;

U: Expanded uncertainty = multiplying the combined standard uncertainty by a coverage factor k=2, what for normal distribution have a level of confidence of 95%

7. Appendix: 1. Measurement of the tyre dimensions

8. Warning: Test results are concerning this sample only. It is strongly prohibited to copy any part of this report without permission of the Testing Laboratory. The results apply to the sample as received.

Approved by: Laboratory quality manager RNDr. Petr Sliž



Sample No 54559 Tyre size: 120/70B19 Mitas Enduro Tra Method: MZR-M-003

Date of measurement	Tyre		Tyre width at six points on circumference						Overall tyre	
	inflation	cicumf.	1	2	3	4	5	6	width	diameter
	kPa	mm	mm	mm	mm	mm	mm	mm	mm	mm
24.01.2023	280	2 066	123,6	123,9	123,6	124	123,8	123,9	124,0	658

**TRELLEBORG TEST REPORT No. 2023 - 454**

TTC Zlín, Šternberská 446, Louky, 763 02 Zlín

Testing Laboratory No.1253, accredited by Czech Accreditation Institute according ČSN EN ISO/IEC 17025:2018

1. Customer: Trelleborg Wheel Systems Moto, d.o. Requirement No.: DLI/23018
 Škofjeloška cesta 6 Dept.: Moto Kranj Task: 01S/2023/DLI
 4000 Kranj Project No.: 70001034
 Slovenia Application date: 16.01.2023
 Responsible: Mr. Lončarič Report issue date: 24.01.2023
 Test motive: Prototype tyres V1 (ECE homologation), 70001034 (224142)

2. Tested sample: Tyre Sort: M Ident. No.: 54559
 Dimension 120/70B19 Name: Mitas Enduro Trail+ E-07+ Dakar
 Designation 1, V1 Product: TWS India Approval -
 LI: 60 SS: H IP: 290 kPa PR LR: B Type TL/TT M+S M
 Weight: 5,84 kg Measuring rim 3,50x19 DOT: - DOP: 4322

3. Test: Sidewall lettering inspection
 Method: KPB-M-003 accredited

4. Test condition: Testing machine: - Drum: - mm Ambient temperature: 25±5°C
 Testing rim: MT3,50x19 H2 Inflation: 290 kPa
 Load: daN Drum speed: km/h Slip: 0° Camber: 0°
 Cycle min/max: Track min/max: km


5. Results: See appendix of protocol: 23-0454
 Undergo cycles: Undergo track: km

6. Evaluation: Criterion defined in ECE-R75 and other standards
 -
 U: Expanded uncertainty = multiplying the combined standard uncertainty by a coverage factor k=2, what for normal distribution have a level of confidence of 95%

7. Appendix: 1. Tyre lettering inspection

8. Warning: Test results are concerning this sample only. It is strongly prohibited to copy any part of this report without permission of the Testing Laboratory. The results apply to the sample as received.

Approved by: Laboratory quality manager RNDr. Petr Slíž

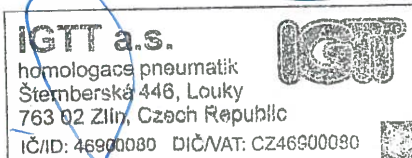

Sample No.: 54559 Size: 120/70B19 Mitas Enduro Trail+ E-07 Method: KPB-M-003

Date: 23.01.2023


Dimension of approval mark:

diameter of circle: 0 mm

height of letter E: 0 mm

height of number: 0 mm

height of text 75R....: 0 mm

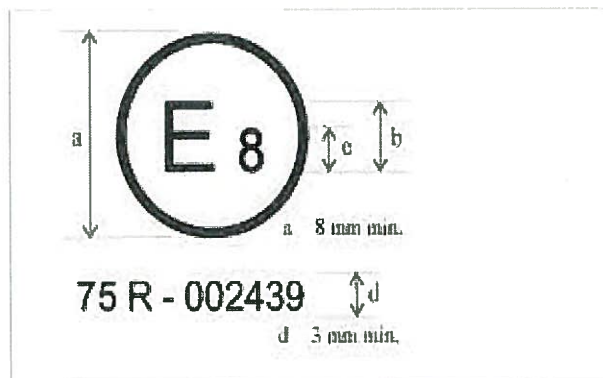

Sidewall lettering:

b >= 4 mm (min): 3 mm

b TUBELESS M + S

Measured where (text): Tubeless

Size designation (text): Yes

Structure (diagonal/bias belted/radial): B

Trade name (mark): Yes

Speed category (mark): Yes

Load capacity (mark): Yes

Ply rating (mark): No

TUBELESS (text): Yes

REINFORCED or REINF (text): No

M+S or M.S or MaS (mark): Yes

MST (mark): Yes

Date of production (wwyy): Yes

M/C (mark): Yes

MOPED or CYCLOMOTEUR (text): -

(W) for SS>270km/h: No

Running rotation (mark): Yes

Visible defects or damages: No

QC check mark (stamp): No

Manuf.name or country of or Yes

TWI markings: Yes

DP (mark): No

NHS (mark): No

**TRELLEBORG****TEST REPORT No. 2023 - 459**

TTC Zlín, Šternberská 446, Louky, 763 02 Zlín

Testing Laboratory No.1253, accredited by Czech Accreditation Institute according ČSN EN ISO/IEC 17025:2018

1. Customer: Trelleborg Wheel Systems Moto, d.o.
 Škofjeloška cesta 6
 4000 Kranj
 Slovenia
 Responsible: Mr. Lončarič
 Test motive: Prototype tyres V1 (ECE homologation), 70001034 (224142)

Requirement No.: DLI/23018
 Dept.: Moto Kranj Task: 01S/2023/DLI
 Project No.: 70001034
 Application date: 16.01.2023
 Report issue date: 20.01.2023

2. Tested sample: Tyre Sort: M Ident. No.: 54560
 Dimension 120/70B19 Name: Mitas Enduro Trail+ E-07+ Dakar
 Designation 2, V1 Product: TWS India Approval -
 LI: 60 SS: H IP: 290 kPa PR LR: B Type TL/TT M+S/M
 Weight: 5,7 kg Measuring rim 3,50x19 DOT: - DOP: 4322

3. Test: Speed test
 Method: RZ-M-003 accredited

4. Test condition: Testing machine: H2L Drum: 2000 mm Ambient temperature: 38±3°C
 Testing rim: MT3,50x19 H2 Inflation: 350 kPa capped
 Load: 159 daN Drum speed: km/h Slip: 0° Camber: 0°
 Cycle min/max: Track min/max: km


5. Results: Without failure.
 Difference of tyre circumference at start and at end of test: 0,5 %
 Undergo cycles: 77 782 Undergo track: 160 km

6. Evaluation: Criterion no defects and circumf.difference before and 6h after test max. ±3,5%
 -
 U: Expanded uncertainty = multiplying the combined standard uncertainty by a coverage factor k=2, what for normal distribution have a level of confidence of 95%

7. Appendix: 1. Drum tyre test record

8. Warning: Test results are concerning this sample only. It is strongly prohibited to copy any part of this report without permission of the Testing Laboratory. The results apply to the sample as received.

Approved by: Laboratory quality manager RNDr. Petr Sliž

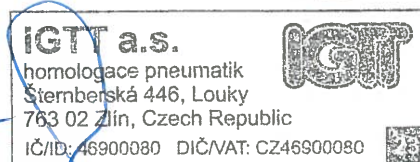

Sample No.: 54560		Dimension:		120/70B19		Mitas Enduro Trail				Test:		RZ-M-003	
ID No.	Test stage	Date time dd.mm.rrrr hh.mm.ss	Step duration hhh:mm:ss	Test duration hhh:mm:ss	Speed km/h	Load daN	Inflation kPa	Radius mm	Surface °C	Room °C	Distance km	Cycles	Diameter/ deflection mm
1	Start	18.01.2023 17:55:34	000:00:00	000:00:00			350			36,0			658
2	Cont	18.01.2023 18:15:41	000:20:00	000:20:00	90,0	159		322		36,4	30	14 730	7
3	Cont	18.01.2023 18:25:43	000:10:00	000:30:00	180,0	159		324		37,1	60	29 372	5
4	Cont	18.01.2023 18:35:45	000:10:00	000:40:00	190,0	159		325		37,4	91	44 746	4
5	Cont	18.01.2023 18:45:47	000:10:00	000:50:00	200,1	159		326		37,5	125	60 886	3
6	Cont	18.01.2023 18:55:49	000:10:00	001:00:00	210,0	159		326		37,7	160	77 782	3
7	Int:M	19.01.2023 5:26:17	010:30:28	001:00:00						35,0			
8	Int:O	19.01.2023 5:26:20	000:00:03	001:00:00			337			35,0			661
9	End	19.01.2023 5:26:20	000:00:00	001:00:00						34,8			

Tyre width immediately after end of test(mm): 124,5 - 124,3 - 123,9 - 123,8 - 124,0 - 123,9

Change of tyre circumference before test and 6h after test (%): 0,48

**TRELLEBORG****TEST REPORT No. 2023 - 460**

TTC Zlín, Šternberská 446, Louky, 763 02 Zlín

Testing Laboratory No.1253, accredited by Czech Accreditation Institute according ČSN EN ISO/IEC 17025:2018

1. Customer: Trelleborg Wheel Systems Moto, d.o.
 Škofjeloška cesta 6
 4000 Kranj
 Slovenia
 Responsible: Mr. Lončarič
 Test motive: Prototype tyres V1 (ECE homologation), 70001034 (224142)

Requirement No.: DLI/23018
 Dept.: Moto Kranj Task: 01S/2023/DLI
 Project No.: 70001034
 Application date: 16.01.2023
 Report issue date: 20.01.2023

2. Tested sample: Tyre Sort: M Ident. No.: 54560
 Dimension 120/70B19 Name: Mitas Enduro Trail+ E-07+ Dakar
 Designation 2, V1 Product: TWS India Approval -
 LI: 60 SS: H IP: 290 kPa PR LR: B Type TL/TT M+S/M
 Weight: 5,7 kg Measuring rim 3,50x19 DOT: - DOP: 4322

3. Test: Dynamic growth test
 Method: MDN-M-003 accredited

4. Test condition: Testing machine: DN Drum: - mm Ambient temperature: 25±5°C
 Testing rim: MT3,50x19 H2 Inflation: 290 kPa
 Load: daN Drum speed: 210 km/h Slip: 0° Camber: 0°
 Cycle min/max: Track min/max: km

5. Results: Max. centrifugal radius of tyre at max. speed: 335 mm (limit: 341 mm)
 Overall width of tyre at max. speed: 115 mm (limit: 132 mm)
 Undergo cycles: Undergo track: km

6. Evaluation: Criterion profil doesn't exceed limit curve
 U = 0,5 mm

U: Expanded uncertainty = multiplying the combined standard uncertainty by a coverage factor k=2, what for normal distribution have a level of confidence of 95%

7. Appendix: 1. Tyre profile record : S1-Test limit, S2-10 km/h, S3-210 km/h

8. Warning: Test results are concerning this sample only. It is strongly prohibited to copy any part of this report without permission of the Testing Laboratory. The results apply to the sample as received.

Approved by: Laboratory quality manager RNDr. Petr Sliž

